

1/7

FIG. 1

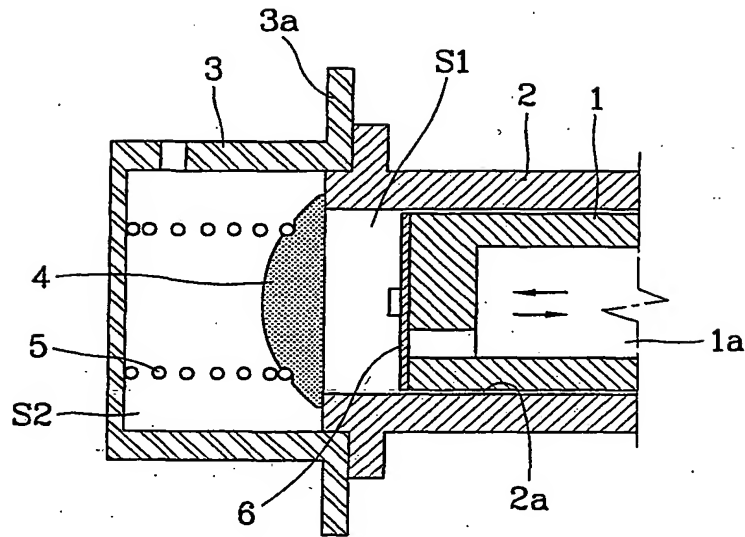
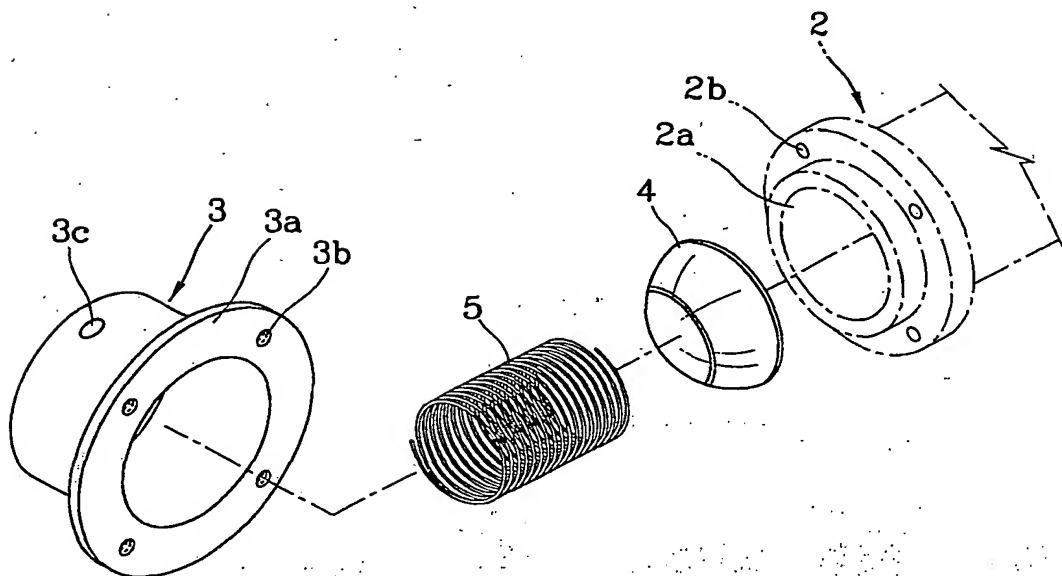


FIG. 2



2/7

FIG. 3A

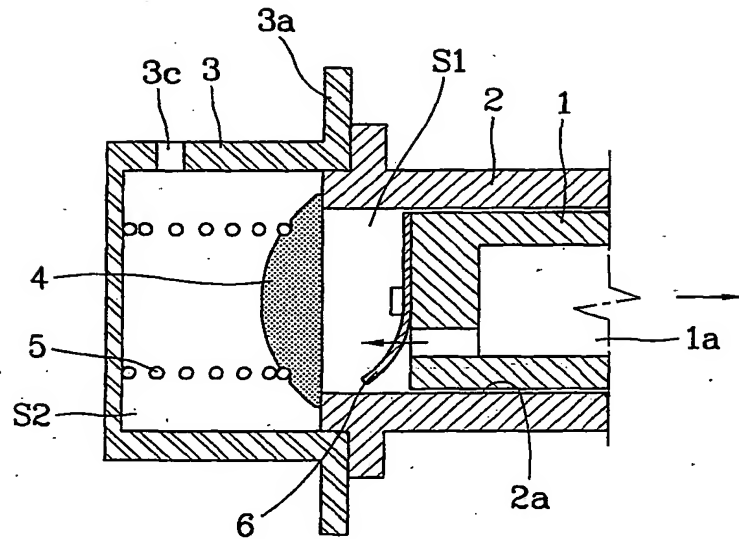
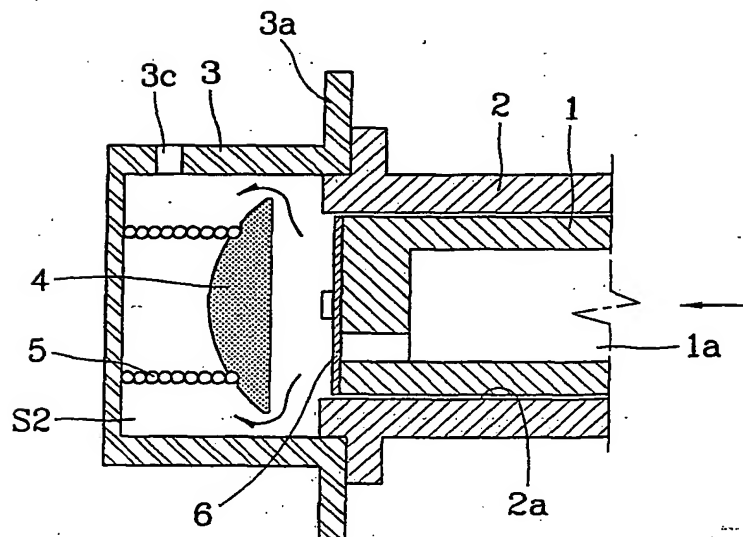


FIG. 3B



3/7

FIG. 4

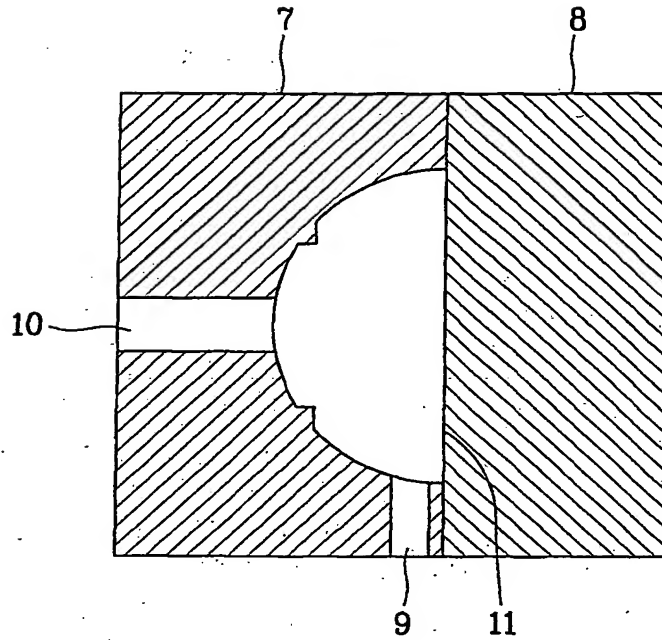
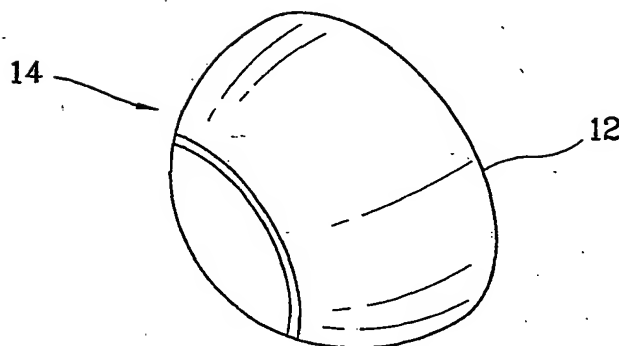



FIG. 5





This exploded perspective view shows the assembly 2, which includes a ring-like component 103, a coiled spring 105, a dome-shaped component 104, and a flange-like component 2. The ring 103 has features 103a, 103b, and 103c. The spring 105 is positioned between the ring 103 and the dome 104. The dome 104 has features 104a, 104b, 104c, 104d, 104e, and 104f. The flange 2 has features 2a and 2b. Dashed lines indicate the assembly path and alignment of the components.

5/7

FIG. 8A

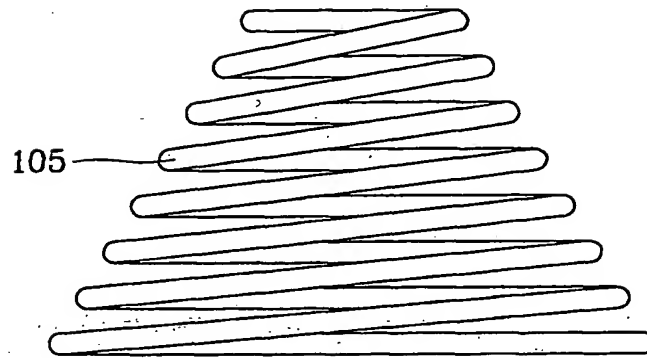
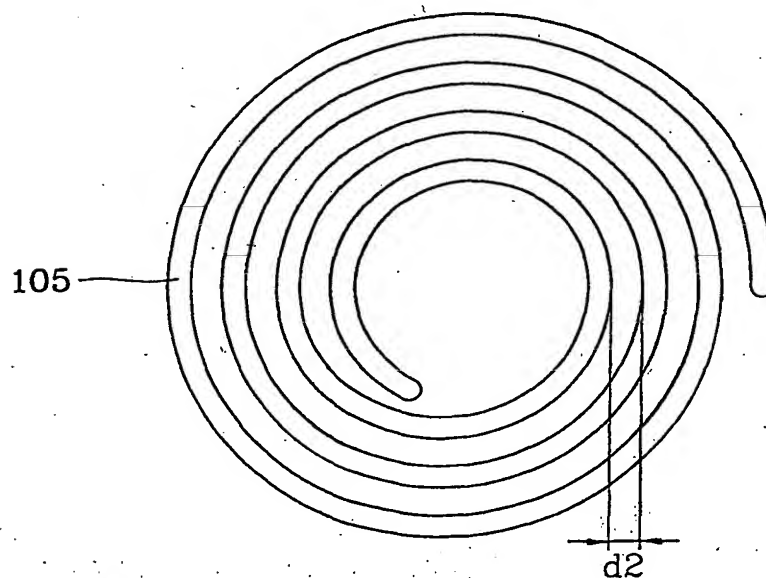


FIG. 8B



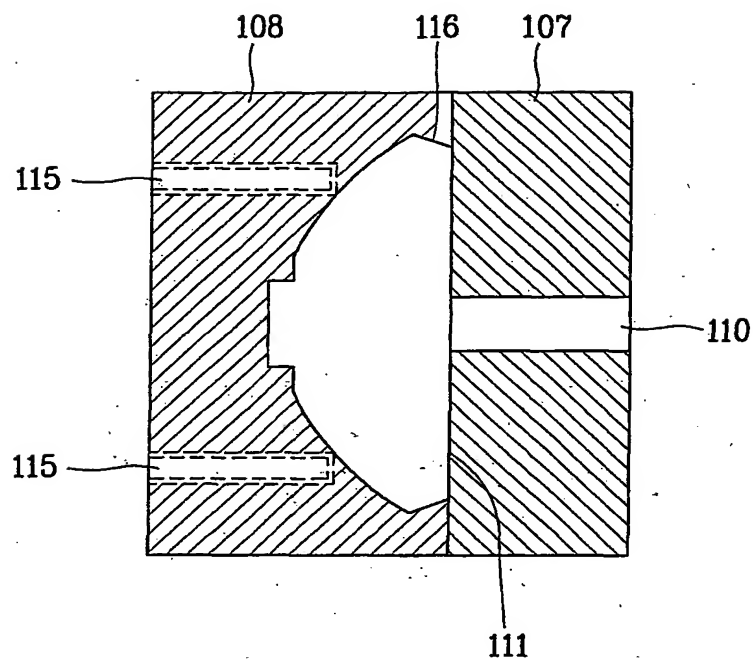
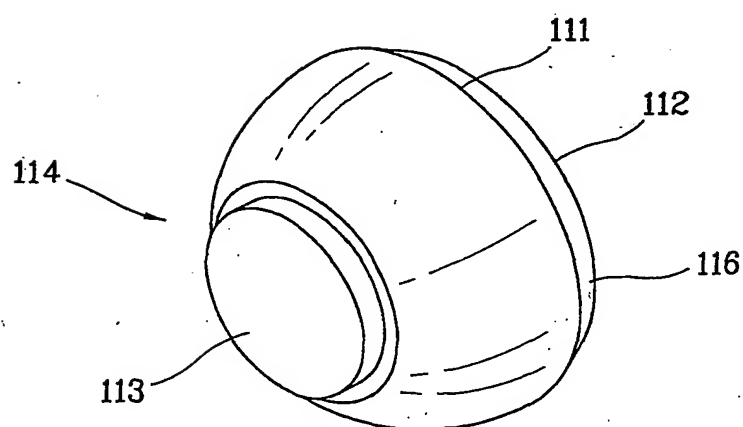
6/7
FIG. 9

FIG. 10



7/7

FIG. 11A

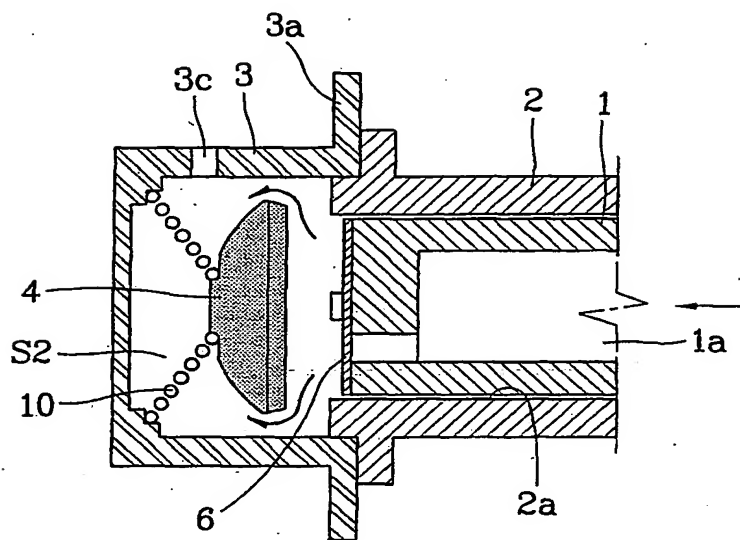


FIG. 11B

